


TUBE WITH OST CONNECTOR, TUBE CLAMP AND PANEL MOUNTING BRACKET

- CALIBRATION — K
- SHEATH MATERIAL — 304 STAINLESS STEEL
- SHEATH DIA. — .125"
- SHEATH LENGTH — 60"
- WIRE LENGTH — 63"
- WIRE INSULATION — MAGNESIUM OXIDE
- TERMINATION — OST FEMALE CONNECTOR AT ONE END AND STRIPPED LEADS AT OTHER
- SPECIAL OPTIONS — SHEATHING: 304 SS, 321 SS OR INCONEL 600


OSK3424
\$65 ea.
 Plus One-Time Set-Up Charge

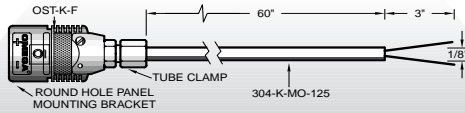

TEFLON® INSULATED TWISTED SHIELDED WIRE WITH MTP TERMINATIONS

- CALIBRATION — T
- SHEATH LENGTH — 240"
- WIRE AWG — 24 STRANDED
- WIRE LENGTH — 240"
- WIRE INSULATION — TEFLON®
- TERMINATION — MTP FEMALE AND MALE


OSK3680
\$25 ea.
 Plus One-Time Set-Up Charge

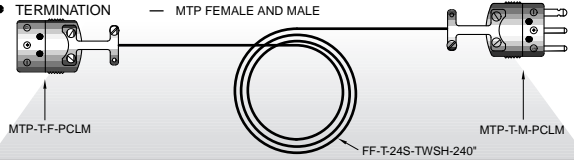

GLASS OVER GLASS INSULATED WIRE WITH CUT END AND NHX TERMINATIONS

- CALIBRATION — K
- SHEATH LENGTH — "L"
- WIRE AWG — 24
- WIRE INSULATION — GLASS OVER GLASS WITH STAINLESS STEEL OVERBRAID
- TERMINATION — NHX FEMALE CONNECTOR AT ONE END AND CUT END AT OTHER


OSK3512
\$76 ea.
 Plus One-Time Set-Up Charge

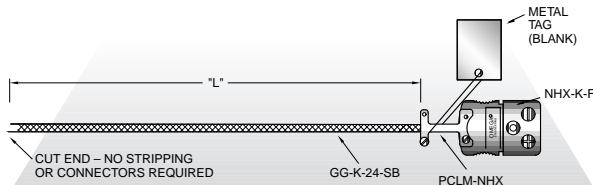

TEFLON® INSULATED WIRES WITH STAINLESS STEEL OVERBRAID AND 2 SMPW CONNECTORS AT BOTH ENDS

- CALIBRATION — K
- WIRE AWG — 24 STRANDED
- WIRE INSULATION — TEFLON® WITH STAINLESS STEEL OVERBRAID
- TERMINATION — TWO SMPW FEMALE CONNECTORS AT ONE END AND TWO SMPW MALE CONNECTORS AT OTHER


OSK4568
\$84 ea.
 Plus One-Time Set-Up Charge

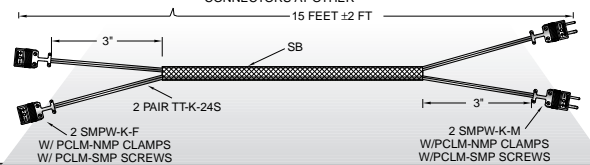

PFTS SERIES HEXAGONAL PLUG WITH 10 PAIRS OF TYPE T TC WIRE

- CALIBRATION — USE WITH 10 T TC PAIRS
- WIRE AWG — 24
- WIRE INSULATION — TEFLON®
- WIRE LENGTH — 16 FT
- TERMINATION — STRIPPED LEADS
- FITTING — PFTFS SERIES HEX FITTING


OSK2263
\$590 ea.
 Plus One-Time Set-Up Charge

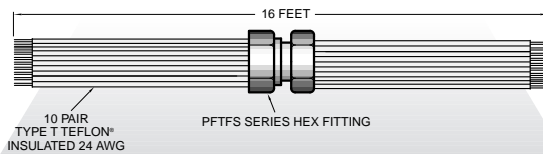

4 TC PAIRS WITH 1/2 x 1/2" NPT BRASS COUPLING

- CALIBRATION — ANY
- WIRE AWG — ANY
- WIRE INSULATION — TEFLON®
- TERMINATION — BEADED JUNCTIONS ON ONE SIDE STRIPPED LEADS ON OTHER SIDE
- FITTING — 1/2 x 1/2" NPT COUPLING (BRASS)


OSK60882
\$195 ea.
 Plus One-Time Set-Up Charge

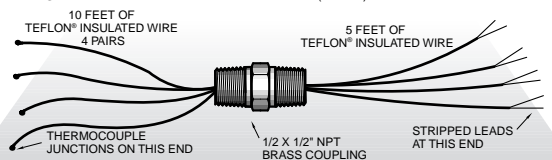

CUSTOM DUAL EXTENSION ASSEMBLY

- CALIBRATION — J
- SHEATH MATERIAL — 304SS
- SHEATH DIA. — 1/8"
- SHEATH LENGTH — 360"
- WIRE AWG — 24 AWG STRANDED
- WIRE LENGTH — 16"
- WIRE INSULATION — TEFLON®
- TERMINATION — STRIPPED LEADS

OSK3707
\$61 ea.
 Plus One-Time Set-Up Charge

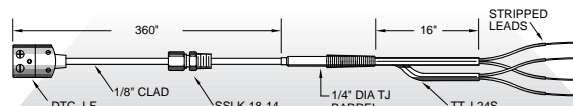

BEADED WIRE THERMOCOUPLES WITH MTC TERMINATION

- CALIBRATION — J
- WIRE AWG — 24
- WIRE LENGTH — 102" AND 12"
- WIRE INSULATION — TEFLON®
- TERMINATION — BEADED AT ONE END AND MTC BACKSHELL CABLE CLAMP AND MTC FEMALE CORD AT OTHER

OSK70080
\$176 ea.
 Plus One-Time Set-Up Charge

